


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 17 TOWNSHIP 14 RANGE 4  
DATE: 7-12-03  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-27-95

IN. S.P.C. E ZONE, NAD 83  
NAME: 14041704  
N: 489601.3256(m)  
E: 61051.1470(m)

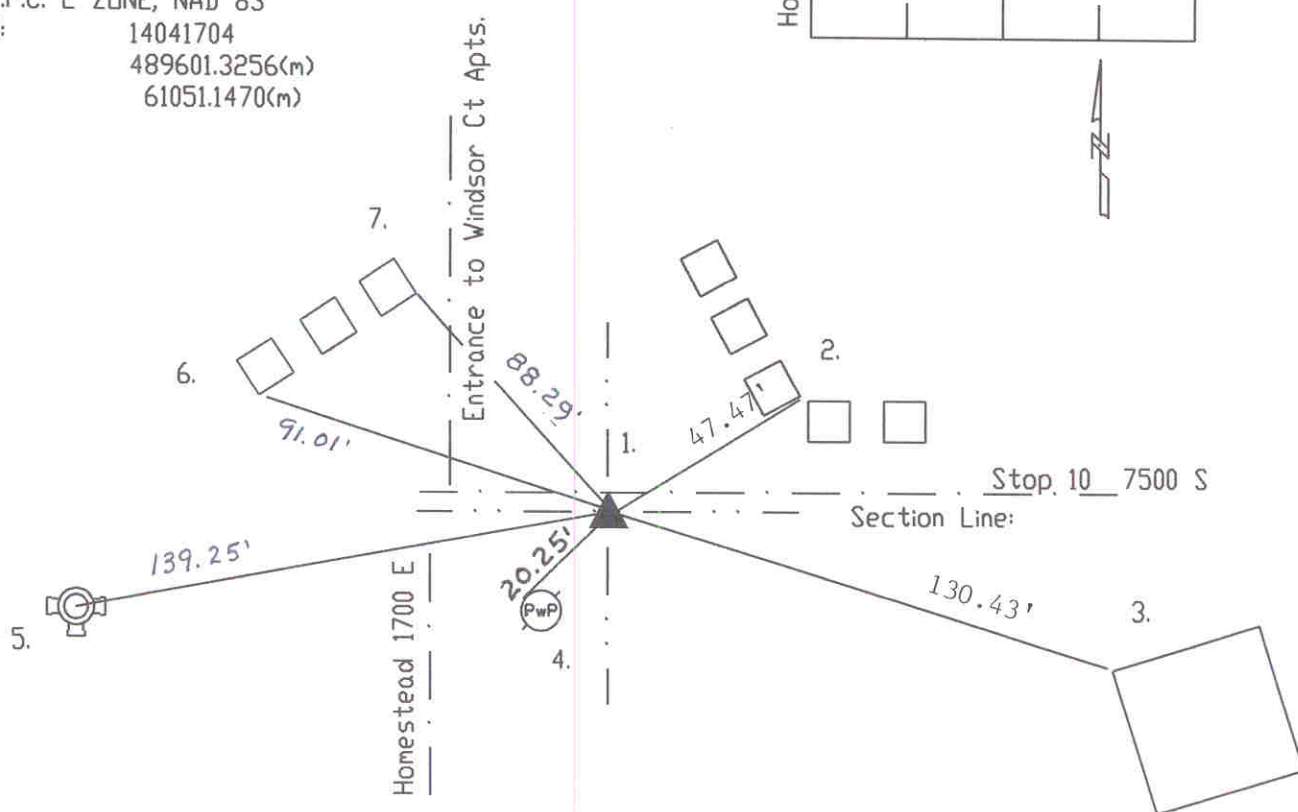

Original post set 1820 by Hendricks with witnesses: 12" beech N 54 E 16 links, 10" dogwood S 23 W 6 links per Marion County Atlas pg. 9. Hosbrook 9-26&27-1854 calcd rock set with witnesses: 30" oak N 9 1/2 E 69 links per Perry Township Legal Survey Book pg. 29, Wilcoxon 3-17-78 called steel pin at surface with stone 12" dn. Wilcoxon 9-25-79 called stone. Gries 6-25-87 called same. Excavated by Kiste 4-27-95 and PK fd at surface. 1/2" iron pin fd 2" dn. Stone fd 12" dn. Harrison set.

HC441704

| REF. | DISTANCE | DESCRIPTION                   |
|------|----------|-------------------------------|
| 1.   | 4'+/-    | Due N to C/L of Stop 10 Rd.   |
| 2.   | 47.47'   | E side brick column           |
| 3.   | 130.43'  | Northwesterly corner of #7505 |
| 4.   | 20.25'   | PK W light pole #719-790 8'up |
| 5.   | 139.25'  | Top nut                       |
| 6.   | 91.01'   | S side brick column           |
| 7.   | 88.29'   | E side brick column           |
|      |          |                               |
|      |          |                               |
|      |          |                               |